


Verbatim LED PAR20 E27 8W

3000K Warm White 380 LM DIM


- E27 Socket
- 220 - 240V
- 35,000 hours Lifetime
- Dimmable
- 84% Energy Saving
- Luminous Flux: 380 lm
- Equivalent to 49W incandescent bulb

Product Number	52232
General Data	
Lamp Socket	E27
Electric Data	
Wattage (W)	8
Wattage Equivalent (W)	49
Voltage (V)	220 - 240 V
Dimmable	yes
Power Factor	0.86
Operating Frequency (Hz)	50-60
Geometric Data	
Length (mm)	94
Diameter (in mm)	60
Weight (g)	140
Photometric Data	
Luminous Flux (lm)	380 lm
Luminous Flux 90° Cone (lm)	340
CRI	≥ 80
CCT (K)	3000
Luminous Intensity (cd)	900
Beam Angle (°)	35
Luminous Efficacy (lm/W)	43
Lifetime (hrs)	35,000
Switching Cycle	60,000



30/07/2014


Photometric Diagrams

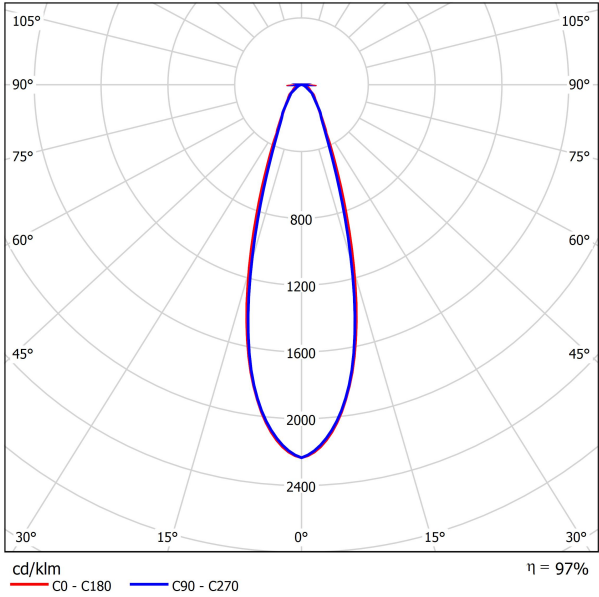

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	0.28 0.29	E(0°) 3408 E(C90) 15.5° 1536 E(C0) 16.1° 1519
1.0	0.55 0.58	E(0°) 852 E(C90) 15.5° 384 E(C0) 16.1° 380
1.5	0.83 0.87	E(0°) 379 E(C90) 15.5° 171 E(C0) 16.1° 169
2.0	1.11 1.15	E(0°) 213 E(C90) 15.5° 96 E(C0) 16.1° 95
2.5	1.39 1.44	E(0°) 136 E(C90) 15.5° 61 E(C0) 16.1° 61
3.0	1.66 1.73	E(0°) 95 E(C90) 15.5° 43 E(C0) 16.1° 42

Distance [m] Cone Diameter [m] Illuminance [lx]
C0 - C180 (Half-value Angle: 32.2°)
C90 - C270 (Half-value Angle: 31.0°)

Energy Rating

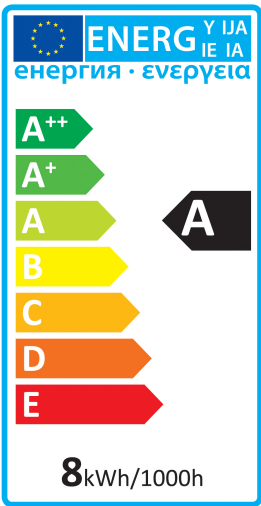

Technical Packaging Details

Barcode	023942522324
EAN 128	(02)00023942522324(37)06(91)162
EAN 14	50023942522329
Pack Dimensions(HxWxL)	97.5 x 64 x 62 (mm)
Pack Weight	160 (g)
MOQ	6
Carton Dimensions (HxWxL)	71 x 206 x 216 (mm)
Cartons/Pallet	210
Layers/Pallet	14
Units/Pallet	1260

30/07/2014